

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106


1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Fairview Architectural Pty Ltd
18-20 Donald Street
Lithgow NSW 2790

Test Number : 22-001592
Issue Date : 27/05/2022
Print Date : 27/05/2022

Sample Description Clients Ref : "Vitracore G2 with 200x200mm hole"
Rigid panel with centralised hole
Colour : White, Cream, Silver, Black
End Use : Cladding of Buildings
Nominal Composition : Aluminium bonded laminate
Nominal Mass per Unit Area/Density : 4.6kg/m²
Nominal Thickness : 4mm

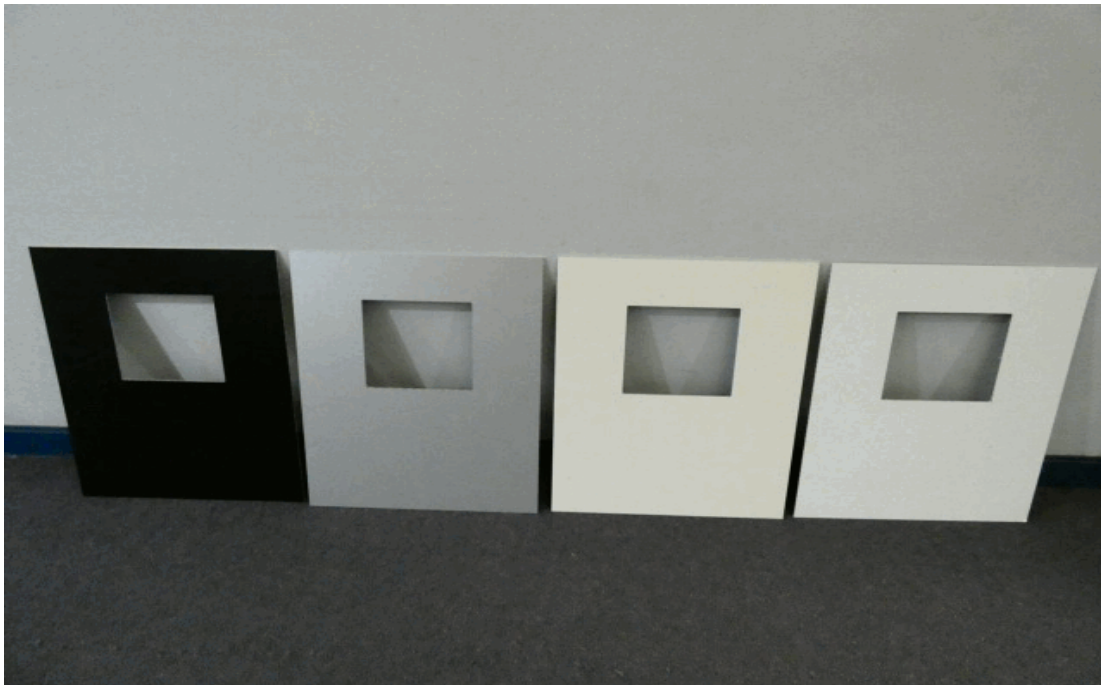

268914

58125

Page 1 of 3

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



A handwritten signature in blue ink, appearing to read 'Fiona McDonald'.

Fiona McDonald
APPROVED SIGNATORY

A handwritten signature in black ink, appearing to read 'Michael A. Jackson'.

MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Fairview Architectural Pty Ltd
18-20 Donald Street
Lithgow NSW 2790

Test Number : 22-001592
Issue Date : 27/05/2022
Print Date : 27/05/2022

AS/NZS 1530.3-1999

Methods for Fire Tests on Building Materials, Components and Structures
Part 3: Simultaneous Determination of Ignitability,
Flame Propagation, Heat Release and Smoke Release

Face tested: Face (White,cream,silver,black)

Date tested: 24-05-2022

	Standard Error	Mean
Ignition time	Nil	Nil min
Flame propagation time	Nil	Nil sec
Heat release integral	Nil	Nil kJ/m ²
Smoke release, log d	0.0659	-1.9095
Optical density, d		0.0130 / metre

Number of specimens ignited: 0

Number of specimens tested: 6

Regulatory Indices:

Ignitability Index 0 Range 0-20

Spread of Flame Index 0 Range 0-10

Heat Evolved Index 0 Range 0-10

Smoke Developed Index 1 Range 0-10

268914

58125

Page 2 of 3

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

Fiona McDonald
APPROVED SIGNATORY



MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Fairview Architectural Pty Ltd
18-20 Donald Street
Lithgow NSW 2790

Test Number : 22-001592
Issue Date : 27/05/2022
Print Date : 27/05/2022

These results only apply to the specimen mounted, as described in this report. The result of this fire test may be used to directly assess fire hazard, but it should be recognised that a single test method will not provide a full assessment of fire hazard under all fire conditions.

Ignition is initiated by a pilot flame that is held near, but does not touch the specimen. A material that does not ignite during the standard test may ignite if contacted with a pilot flame during the test.

Each test specimen had an unattached backing of 4.5mm thick fibre reinforced cement board.

Each test specimen was restrained on the exposed face by a layer of galvanised welded square mesh made from wire of nominal diameter 0.8mm and nominal spacing 12mm in both directions and the assembly clamped in four places.

268914

58125

Page 3 of 3

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



Fiona McDonald
APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR